

BATTERIOPLADER - BRUGERMANUAL

Vigtigt! Sikkerhedsanvisninger

Læs altid sikkerhedsanvisninger omhyggeligt inden brug.



Advarsler


- For at sikre, at opladning og håndtering af batteri/oplader foregår på en forsvarlig måde, og de involverede forstår faren derved, må opladning af batteri kun håndteres af personer fra 8 år og derover
- Personer med nedsatte fysiske, sensoriske eller mentale evner, manglende erfaring eller viden skal overvåges eller trænes i brugen af batteri/oplader
- Børn må ikke lege med batteri eller oplader! Rengøring og vedligeholdelse må ikke udføres af børn uden opsyn
- Forsøg IKKE at genoplade ikke-genopladelige batterier med batteriopladern
- Af sikkerhedshensyn bør batteriet oplades i et rum med røgalarm installeret
- Placer ikke opladeren eller batteriet i nærheden af brændbare materialer. Sørg for, at batteri og oplader placeres på en brandsikker overflade før opladning.

Introduktion

Opladeren er udstyret med et ud af 4 mulige ladestik illustreret nedenfor.

Batterioplader

Ladestik typer

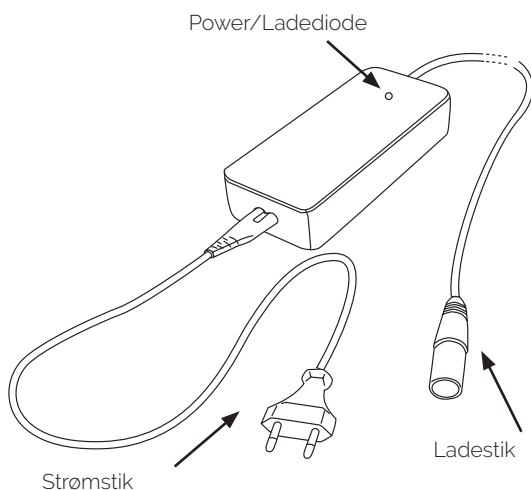

Single



3-Pins



4-Pins



Magnet stik

Opladning af batteri

Opladning skal ske indendørs eller under halvtag, da laderen kun er stænktæt. Batteriet bør oplades ved en temperatur på 18–20°C. Oplad aldrig batteriet ved temperaturer under 0°C eller over 45°C.

Bemærk! Det er vigtigt, at rækkefølgen af punkterne for opladning af batteri overholdes, uanset om batteriet er monteret/afmonteret.

Tilslutning af oplader

1. Sæt ladestikket fra opladeren i batteriets ladestik
2. Sæt strømstikket i stikkontakten og tænd for opladeren

Power/Charge diode

- Er opladeren tilsluttet stikkontakt, lyser dioden rød (uden batteri tilsluttet)
- Når batteriet tilsluttes og dioden lyser rødt, skal det oplades
- Lyser dioden grøn, er batteriet fuldt opladet
- Sluk for opladeren inden ladestikket fjernes fra batteriet

Generelt

- Vi anbefaler, at man af og til lader batteriet forblive tilsluttet i min. 24 timer, efter dioden lyser grønt, da det giver en bedre balance mellem hver celle i batteriet
- Efter endt opladning isættes det lille gummidæksel i batteriets stik, for at beskytte det mod snavs
- Når batteriet er fuldt opladet, går opladeren automatisk over på stand-by og bruger derfor meget lidt strøm. Hvis man ikke skal bruge batteriet i længere tid, anbefales det, at ladestikket tages ud, og der slukkes for opladeren.

BATTERY CHARGER - USER MANUAL

Important! Safety instructions

Always read the safety instructions before use.




Warning

- To ensure that the charger and battery are handled in a safe way, and that users involved understand the danger thereby, charging of the battery must only be handled by persons aged 8 and up.
- Persons with reduced physical, sensoric or mental abilities, lack of experience or knowledge must be supervised or trained in the use of the battery and charger.
- Do not let children play with the battery and/or charger. Children must be supervised if they perform any kind of cleaning and/or maintenance.
- Do NOT attempt to recharge non-rechargeable batteries with the battery charger
- For safety reasons, if charging the battery indoors the battery should be recharged in a room with a smoke detector installed.
- Do not place the charger or the battery near flammable materials. Ensure the battery and charger are placed on a fireproof surface before charging.

Introduction

The charger will be supplied with one out of four different charging sockets illustrated below.

Battery charger

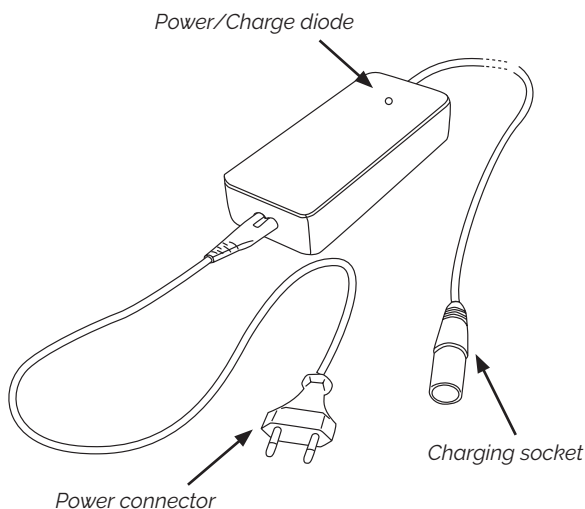

Charging sockets



Single



3-Pins



4-Pins



Magnet plug

Battery charger/charging

Charging must be done indoors or in an open shed as the charger is only splash proof. Charging should be done at 18–20°C. Never charge a battery if the temperature is below 0°C or over 45°C.

Note! It is important that the order of the points for charging the battery is followed, regardless of whether the battery is mounted/removed.

Connecting the charger

1. Plug the charger into the battery charging connector
2. Set the network plug into the power outlet and switch the charger on

Power/Charge diode

- If the battery charger is connected to mains, the diode lights red (With no battery connected)
- When the battery is connected to the charger and the diode lights red, then the battery should be recharged
- When the Power/Charge LED shows green, the battery has been recharged
- Turn the power off before disconnecting the charger from the battery

General

- To keep the battery in good condition, we recommend that you occasionally charge the battery for a minimum of 24 hours after the green light appears. The reason being that this will balance out each cell, providing a healthy battery
- After charging, insert the small rubber cover into the battery slot to protect it against dirt.
- When a battery has been fully recharged, the battery charger will enter stand-by state and use very little power. It is recommended to unplug the charging socket and switch off the charger if you do not need the battery for a long time.