



Assembly Manual


ASSEMBLING THE PEDALS

Assemble the pedals with a 15mm wrench. WARNING: left pedal (L) right pedal (R). The pedals are not interchangeable.



ASSEMBLING AND ADJUSTING THE STEM AND THE HANDLEBAR

Use a 6mm (or 12mm for basic models) hex wrench to adjust the inclination of the handlebar. Adjust and fix the position of the stem with a 6mm hex wrench, at a LOWER HEIGHT than the safety line.

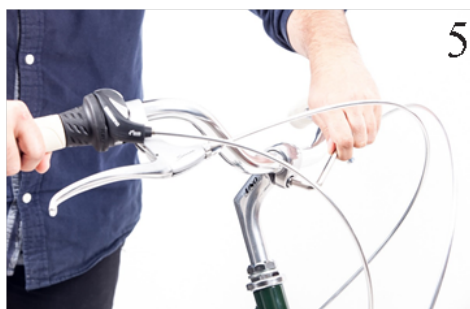

SADDLE

Place the seatpost at a LOWER HEIGHT than the safety line. A safe height must allow you to lay both feet with the entire plant. Tighten the seat bolt with a 12mm wrench (in case there of locking lever turn it and secure it)



TYRES

Inflate the tyres at at least 3-4 bars and check the pressure after every use of the bike. An inadequate pressure of the tyres may lead to excessive wear and may damage the rims.



ALPINA di Montevercchi Manolo & C sas

Via Archimede 485 – 47521 Cesena (FC) Ph+39 0547 645699 (info@alpinabike.com)

ALPINA reserve te right to make modifications or changes to the components without notice.

The warranty can be accessed by registering to the website www.alpinabike.com